




TAGA
HARMONY

TA-400MIC

CUSTOM INSTALL
INTEGRATED AMPLIFIER

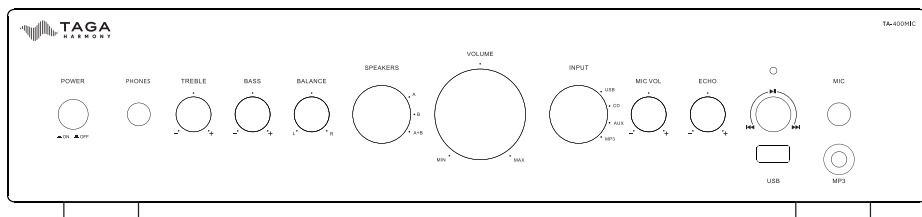

Instruction manual

Introduction

Thank you for purchasing this TAGA Harmony amplifier.

The TA-400MIC is an efficient, cost-effective choice for home hi-fi systems and commercial installations in restaurants, pubs, shops, conferencing rooms, fitness clubs for both background music, voice playback or karaoke systems.

The TA-400MIC integrated amplifier offers the finest music performance at this price level and perfect matching with most speakers available in the market. It utilizes advanced materials, state of the art engineering and innovative design by an international team of professional designers.

It delivers pure and distortion-limited power as well as rich sound performance with stunning accuracy, soundstage and sensational dynamics.

Key features:

- Built-in **headphone output** is a perfect choice for those who prefer discrete listening.
- Built-in **microphone input** with a mixing and echo control is a perfect solution for voice playback.
- **USB input** to quickly and easily play music from a USB flash drive (supports MP3 / WMA / WAV / APE files).
- **MP3 3.5 mm (1/8") stereo input** on the front panel to quickly connect a smartphone, tablet or laptop.
- Two **RCA stereo inputs** at the rear to hook up additional equipment like a CD player, radio tuner or other analog devices.
- **Preamplifier output** dedicated for an optional external power amplifier, a powered subwoofer or active speakers.
- Two **speaker outputs (A and B)** to build a simple and cost-effective two-zone sound system.
- The removable IEC power cable gives you an option to upgrade your system with a premium power cable in any time.

Cleaning

Do not use strong or abrasive cleaners. Use a damp, soft cloth for cleaning.

Specifications and the latest instruction manual edition

Full technical specifications and the latest edition of the instruction manual are available on **www.TagaHarmony.com**.

Contents

Safety Instructions	4
Front and Rear Panel	6
Hooking Up Speaker Cables	7
Hooking Up the Amplifier	8
Operation	10
Play from a USB Flash Drive	13
Additional Information	14
Specifications	15
Kit Content	16

Safety Instructions

IMPORTANT READ THIS SECTION CAREFULLY BEFORE PROCEEDING!



CAUTION

**RISK OF ELECTRIC SHOCK
DO NOT OPEN**



WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS PRODUCT TO RAIN OR MOISTURE. DO NOT REMOVE COVER (OR BACK). NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.



The triangle containing a lightning symbol is intended to alert the user to the presence of uninsulated dangerous voltages within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



An exclamation mark in a triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPARATUS TO RAIN OR MOISTURE, AND OBJECTS FILLED WITH LIQUIDS, SUCH AS VASES, SHOULD NOT BE PLACED ON THIS APPARATUS.

CAUTION: TO PREVENT ELECTRIC SHOCK, FULLY AND SECURELY INSERT THE POWER CABLE PLUG INTO THE POWER OUTLET, AND POWER CABLE CONNECTOR INTO THE UNIT SOCKET (IF THIS UNIT IS NOT EQUIPPED WITH AN INTEGRATED [ATTACHED] POWER CORD).


CAUTION: FOR CONTINUED PROTECTION AGAINST RISK OF FIRE, REPLACE THE FUSE (IF THE UNIT IS EQUIPPED WITH A USER REPLACEABLE FUSE) ONLY WITH THE SAME AMPERAGE AND VOLTAGE TYPE. IN CASE WHEN THE UNIT IS NOT EQUIPPED WITH A USER REPLACEABLE FUSE - REFER REPLACEMENT TO QUALIFIED SERVICE PERSONNEL.

WARNING: THE UNIT MAY BECOME HOT. ALWAYS PROVIDE ADEQUATE VENTILATION TO ALLOW FOR COOLING. DO NOT PLACE THE UNIT NEAR A HEAT SOURCE, OR IN SPACES THAT CAN RESTRICT VENTILATION.

Safety Instructions


1. Read Instructions - All the safety and operating instructions should be read before the product is operated.
2. Retain Instructions - The safety and operating instructions should be retained for future reference.
3. Heed Warnings - All warnings on the product and in the operating instructions should be adhered to.
4. Follow Instructions - All operating and use instructions should be followed.
5. Cleaning - Unplug this product from the power outlet before cleaning. Do not use liquid cleaners or aerosol cleaners.
6. Water and Moisture - Do not use this product near water - for example, near a bath tub, wash bowl, kitchen sink or laundry tub; in a wet basement; or near a swimming pool; and the like. These precautions also apply to the power cord.
7. Accessories - Do not place this product on an unstable cart, stand, tripod, bracket or table. The product may fall, causing serious injury to a child or adult and serious damage to the product. Use only with a cart, stand, tripod, bracket or table recommended by the manufacturer or sold with the product. Any mounting of the product should follow manufacturer's instructions and should use a mounting accessory recommended by the manufacturer.
8. Ventilation - This unit may be equipped with slots and openings in the cabinet (housing) which are provided for ventilation and to ensure reliable operation of the product and to protect it from overheating and these openings must not be blocked or covered. The openings should never be blocked by placing the product on a bed, sofa, rug or other similar surface. This product should be not placed in a built-in installation such as a bookcase or rack unless proper ventilation is provided or the manufacturer's instructions have been adhered to. For products equipped with a separate power supply unit, leave at least 5cm (2in.) of free space on all sides and the top of the power supply.
9. Power Sources - This product should be operated only from the type of power source indicated on the marking label (placed on the product and/or, if applicable, on a separate power supply unit). If you are not sure of the type of power supply in your home, consult your product dealer or local power company. For products intended to operate from battery power or other sources, refer to the operating instructions.
10. Grounding and Polarity - some units for proper operation or to take full advantage of their capabilities may require to be connected to a grounded power outlet - refer to the user manual for more information.
Some units may have markings for the live (L) and neutral (N) conductors for power - in order to take full advantage of capabilities of such products, it is recommended to properly connect the polarity according to the markings on the unit - refer to the user manual for more information. Connecting the polarity not in accordance with the markings will not affect the durability and reliability of the device.
11. Power-cord Protection - Power supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them, paying particular attention to cords at plugs, convenience receptacles and the point where they exit from the product.
12. Lighting - For added protection for this product during a lighting storm or when it is left unattended and unused for long periods of time, unplug it from the wall outlet and disconnect the antenna or system cables. This will prevent damage to the product due to lighting and power-line surges.
13. Overloading - Do not overload wall outlets, extension cords or integral convenience receptacles as this can result in a risk of fire or electric shock.
14. Object and Liquid Entry - Never push objects of any kind into this product through openings as they may touch dangerous voltage points or short-out parts that could result in a fire or electric shock. Do not expose this apparatus to dripping or splashing and ensure that no objects filled with water, such as vases are placed on the apparatus.
15. Servicing - Do not attempt to service this product yourself as opening or removing covers may expose you to dangerous voltage or other hazards. Refer all servicing to qualified service personnel.
16. Damage Requiring Service - Unplug this product from wall outlet and refer servicing to qualified personnel under the following conditions:
 - when power supply cord or plug is damaged;
 - if liquid has been spilled or objects have fallen into the product;
 - if the product does not operate normally by following the operating instructions. Adjust only those controls that are covered by the operating instructions as an improper adjustment of other controls may result in damage and will require extensive work by a qualified technician to restore the product to its normal operation;
 - if the product has been dropped or damaged in any way;
 - if the product exhibits a distinct change in performance - this indicates a need for a service.
17. Replacement Parts - when replacement parts are required, be sure the technician has used replacement parts specified by the manufacturer or with the same characteristics as the original part. Unauthorized substitutions may result in fire, electric shock or other hazards.
18. Safety Check - Upon completion of any service or repairs to this product, ask the service technician to perform safety check to determine that the products is in proper operating condition.
19. Wall of ceiling mounting - The product should be mounted to a wall or ceiling only as recommended by the manufacturer.
20. Heat - The product should be situated away from heat sources such as radiators, heat registers, stoves or other products (including amplifiers) that produce heat.
21. [Refer to products equipped with vacuum tubes] Tube Cage or cover - For your safety and to protect the vacuum tubes this product may be equipped with the factory installed vacuum tube cage or cover.
It is not recommended to remove the cage or cover unless it is required to change the vacuum tubes.
When the cage or cover is removed - do not touch the vacuum tubes - they may be hot and burn the skin!
22. Operating Environment - Operating environment temperature and humidity of the unit: +5°C to +35°C (+41°F to +95°F); less than 85% RH (cooling slots not blocked).

Front and Rear Panel

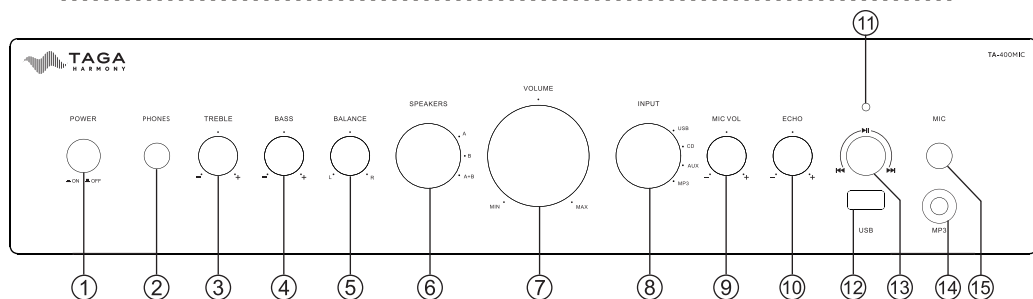

Front Panel:

1. Power Switch (ON and OFF) and Power Status Indicator (around the Power Switch)
2. Headphone 6.5 mm (1/4") Output
3. Treble Regulator
4. Bass Regulator
5. Balance Regulator
6. Speaker Selector (A, B, A+B)
7. Volume Regulator
8. Input Selector (USB, CD, AUX, MP3)
9. Microphone Level Regulator
10. Microphone Echo Regulator
11. USB Input LED Indicator
12. USB Port
13. USB Knob (Play/Pause, Next/Previous)
14. MP3 3.5 mm (1/8") Stereo Input
15. Microphone 6.35 mm (1/4") Input

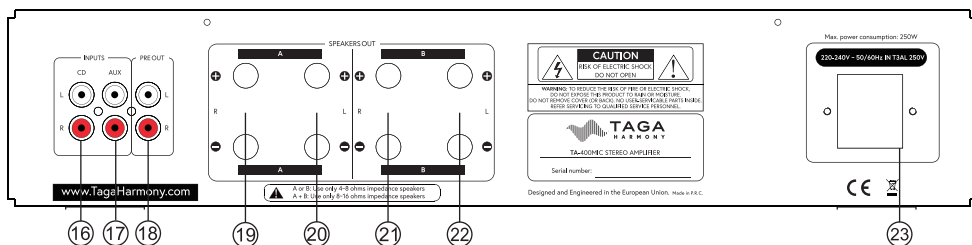

Rear Panel:

16. CD Stereo RCA Input
17. AUX Stereo RCA Input
18. PRE OUT Stereo RCA Output
19. Speaker Group A Right Channel Output (Speaker Connectors)
20. Speaker Group A Left Channel Output (Speaker Connectors)
21. Speaker Group B Right Channel Output (Speaker Connectors)
22. Speaker Group B Left Channel Output (Speaker Connectors)
23. Power Cable Input and Fuse Box



A blown fuse should be only exchanged for exactly the same type as indicated on the rear panel.
The Power Cable should be disconnected!

Hooking Up Speaker Cables

The Speaker Connectors can accommodate up to 10AWG speaker cables as well as most of popular plugs (banana etc.). It is recommended to leave about 150 cm (5 feet) of extra cable at the amplifier end to facilitate positioning and installation of the amplifier. Do not use staples, nails or other metal objects to secure the cables. You will get the best sound quality and least amount of hum by keeping the cables away from other electrical wires and cables.

Pay attention to connecting the polarity of the amplifier correctly with the speakers in each speaker group (speakers should be connected RED + with RED + amplifier connector, BLACK – with BLACK – amplifier connector).



Before connecting make sure that your amplifier is turned off. Do not let bare speaker wires touch each other or any metal part of this unit it may damage this amplifier and / or speakers. This may void your warranty.


Please refer to your speaker instruction manual for more information.

Connecting speaker cables

Speaker cables have 2 conductors. Each conductor should be connected to a separate speaker connector - mind the polarity while connecting.

For each conductor:

1. Remove approximately 10 mm (3/8") of insulation from the end of the conductor. Twist the bare wires firmly together.
2. Loosen the speaker connector.
3. Insert the bare wires of the conductor into the gap of the speaker connector.
4. Tighten the speaker connector.

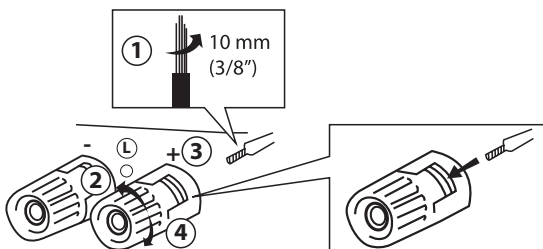


Connecting via banana plug



Mind the polarity while connecting.

Note! An insert hole for the banana plug in some speaker connectors maybe secured with a plastic plug - make sure to remove this plastic plug before inserting the banana plug.


1. Tighten the speaker connector.
2. Insert the banana plug into the end of the corresponding connector.

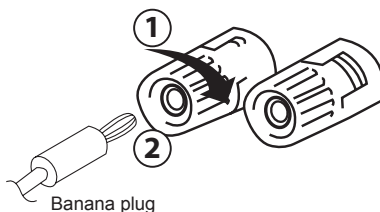

Hooking Up the Amplifier

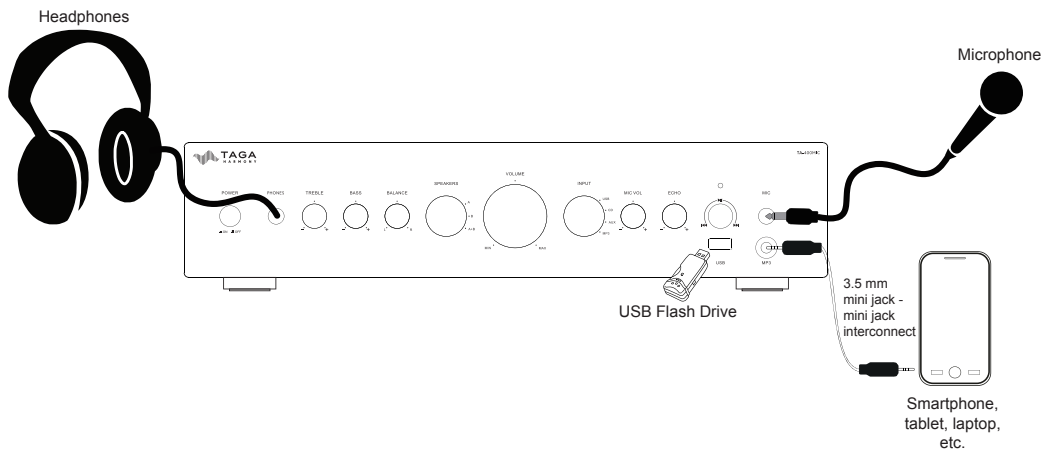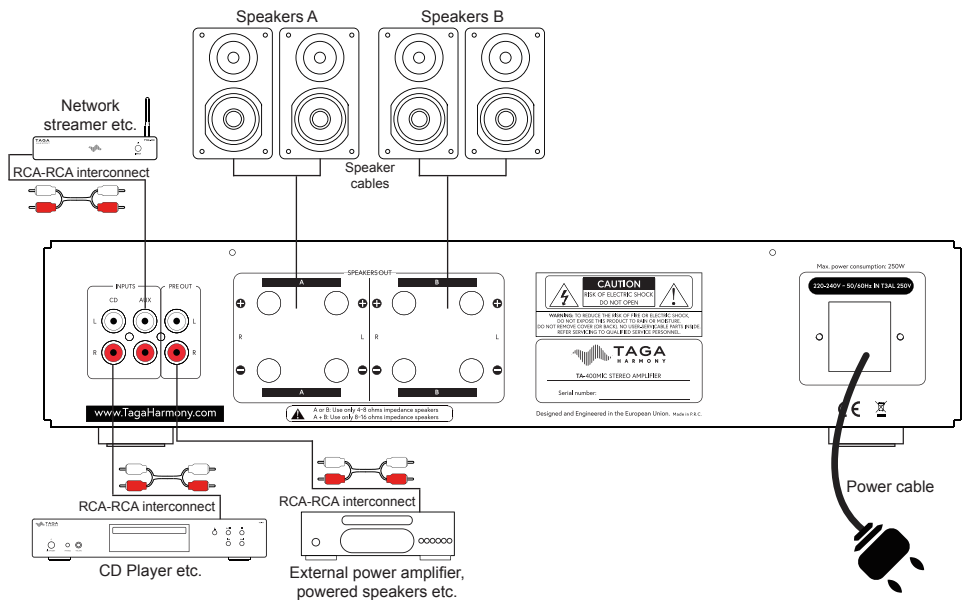

Hooking Up the Amplifier

1. Make sure the amplifier is turned off (the Power Switch  OFF and the Power Cable is removed from the wall outlet).
2. Turn the Volume Regulator to MIN (max counter clockwise).
3. Using speaker cables connect your speakers to the SPEAKERS OUT (A or B, A and B) connectors.
Check "Hooking Up Speaker Cables" for more details.
4. If you want to play music from audio source devices (Network streamer, CD player, DVD player, Blu-ray etc.):
 - a. equipped with an analog RCA output - using RCA-RCA interconnects connect them to the analog inputs (CD, AUX).
 - b. equipped with an analog 3.5 mm (1/8") output - using a 3.5 mm (1/8") mini jack - mini jack interconnect connect it to the 3.5 mm (1/8") Stereo Input (MP3).
5. If you want to play digital audio files connect a USB Flash Drive to the USB Port.
Make sure that this amplifier supports the files you want to play.
Check "Play from a USB Flash Drive" for more details.
6. If you want to use a microphone: using a 6.35 mm (1/4") jack interconnect connect it to the Microphone 6.35 mm (1/4") Input (MIC).
Check "Microphone" for more details.
7. Preamplifier Output (PRE OUT):
this amplifier is equipped with the preamplifier output. Using an RCA-RCA interconnect you can connect to it an external amplification device (power amplifier, powered speakers, active subwoofer etc.) or a recording device (CD recorder etc.).
Check „Preamplifier Output Connection (PRE OUT)" for more details.
8. If you want to listen to music via headphones: connect the headphones to the Phones output.
Check "Headphones connection (PHONES)" for more details.
9. Your amplifier is ready for operation.
















Depending on the speaker configuration (A or B, A + B) only speakers within the below range of impedance may be connected to this amplifier. Connecting speakers outside this range may damage this amplifier and / or speakers. This may void your warranty.

A or B : use only 4 - 8Ω impedance speakers

A + B : use only 8 - 16Ω impedance speakers


Hooking Up the Amplifier

10. External audio equipment connection options:

Input / Output TA-400MIC	Input / Output external equipment	Connection cable
CD, AUX 	Output - RCA sockets 	RCA-RCA interconnect (not supplied) 
PRE OUT output 	Preamplifier input 	RCA-RCA interconnect (not supplied) 
MP3 3.5 mm (1/8") input 	Outputs: 3.5 mm (1/8") socket  lub złącza RCA 	3.5 mm mini jack - mini jack interconnect (not supplied)  3.5 mm mini jack - RCA interconnect (not supplied) 
MIC 6.35 mm (1/4") input 		6.35 mm jack interconnect (not supplied) 

The sockets and ports shown for external equipment and connection options may differ depending on the device.

Operation

1. Plug the Power Cable to the amplifier and into the electrical outlet.
2. Turn on the amplifier – press the Power Switch (the Power Switch  ON).
The Power Status Indicator should turn on in a few seconds.
If it does not, it means that the amplifier is working under in abnormal condition (a protection mode) – turn off the power, unplug the Power Cable and check whether some of the cables are not short circuited.
After fixing the cables turn the amplifier on.
3. Using the Speaker Selector knob select which group of speakers (A or B or A+B) you want to use.
If you want to use 2 pairs of speakers choose the A+B option.

Operation

4. Using the Input Selector knob select which audio source you want to play (corresponding to the selected input).

Make sure the audio source is properly connected to the front and rear panel inputs.

5. Turn on your audio source and start playback.

6. Regulate volume on the amplifier to adjust the level of sound.

Note! Check “Additional Information” for other useful operating instructions.



High volume levels may damage this amplifier and / or speakers. This may void your warranty.

VOLUME regulator:

Using the Volume Regulator you can adjust the sound volume from minimum (the knob – max counterclockwise) to maximum (the knob – max clockwise).



Distortion and sound quality worsening may occur when the knob is in the maximum position. It may damage the amplifier and / or speakers. This may void your warranty.

TREBLE regulator:

You can adjust treble output of the amplifier. The default: the knob is in the center position: the marker on the knob in the vertical position.

Turn the knob counterclockwise (-) to decrease the amount of high frequencies.

Turn the knob clockwise to increase the amount of high frequencies (+).

BASS regulator:

You can adjust bass output of the amplifier. The default: the knob is in the center position: the marker on the knob in the vertical position.

Turn the knob counterclockwise (-) to decrease the amount of low frequencies.

Turn the knob clockwise (+) to increase the amount of low frequencies (+).



Using the BASS / TREBLE regulators at high volume levels may damage this amplifier and / or speakers. This may void your warranty.

BALANCE regulator:

You can adjust the balance of the volume output from the left and right speakers.

Turn the knob towards the speaker (channel) which you want the volume output to be higher than in the other speaker (channel).

The default: the knob is in the center position: the marker on the knob in the vertical position.

Preamplifier Output connection (PRE OUT):

This amplifier is equipped with the preamplifier output, which allows connecting amplification or recording equipment such as a power amplifier, powered speakers, active subwoofer or a CD recorder.

The audio signal from the preamplifier of this device is directed to the PRE OUT and its level is variable controlled by the Volume Regulator.

All sound adjustments (Bass / Treble) will affect the sound transmitted to the PRE OUT.

The output to the SPEAKERS OUT is still active and it works simultaneously with the PRE OUT.

Operation

Headphone connection (PHONES):

When headphones (not supplied with this product) are plugged to the headphone output (Phones) the transmission of sound to the speakers and PRE OUT is switched off.

The speakers and PRE OUT will be active again after you disconnect the headphones.

The volume of the headphones is regulated by the Volume Regulator.

All sound adjustments (Bass / Treble) will affect the sound transmitted to the headphones.



Listening at high volume may cause hearing damage.

Microphone:

This amplifier allows to connect a wired microphone and voice mixing with the background music.

Microphone Level Regulator (MIC VOL):

You can adjust the sound level of the microphone relative to the currently played background music.

To make the microphone sound more audible turn the MIC VOL knob clockwise (+) and to make it less audible rotate the knob counterclockwise (-).

The master volume level for both the microphone and background music is regulated by the Volume Regulator.

The MIC VOL control is also active without the background music (only microphone is working).

Microphone Echo Regulator (ECHO):

You can adjust the level of reverberation of the microphone.

To increase the reverberation turn the ECHO knob clockwise (+) and to decrease it rotate the knob counterclockwise (-).

The default: the knob is in the center position: the marker on the knob in the vertical position.



Using the microphone at high volume levels may damage this amplifier and / or speakers. This may void your warranty.

Play from a USB Flash Drive

This amplifier can play music from most USB Flash Drives and supports most MP3 / WMA / WAV / APE audio files.

1. Using the Input Selector knob select the USB Input.
If the USB flash drive is not inserted then the USB Input Led Indicator will be flashing.
2. Insert the USB Flash Drive into the USB Port.
3. When compatible music files are detected then the playback will start automatically.
In the Play mode the USB Input Led Indicator will be illuminated continuously.
If the USB Flash Drive is empty or contains non-supported files, the USB Input Led Indicator will start flashing.
4. Press the USB Knob ►| once to pause the playback.
Press it again to resume the playback.
In the Pause mode the USB Input Led Indicator will start flashing.
5. Rotate the USB Knob ►►| clockwise to play the next song.
If the last song is detected the playback will start from the first one on the USB Flash Drive.
6. Rotate the USB Knob |◄◄ counterclockwise to play the previous song.
If the first song is detected the playback will start from the last one on the USB Flash Drive.



Depending on the USB Flash Drive type, format and number or arrangements of folders and files some music files may be played in different order or may not be recognized by the amplifier.



We recommend to change input to another one before removing the USB Flash Drive.

Additional Information

Break-In

Your TAGA Harmony amplifier sounds great immediately after it is taken out of the carton but as in all amplifiers, the internal components of this amplifier require a “break-in” period to reach its full sonic capabilities.

During the “break-in” period it is recommended to operate the amplifier at moderate volume levels.

The first level of the “break-in” is reached after approximately 10 hours of play.

The optimal level of the “break-in” is reached after approximately 40 to 60 hours of play.

Turn off procedure

Make sure to turn off the amplifier first when powering down your system.



If the amplifier was turned off even for a short period of time, you should wait at least 2 minutes before turning it back on.

Do not turn it ON then OFF and then ON again in quick succession.

Follow this procedure each time you turn your amplifier OFF / ON.

This precaution will minimize the stress (high voltages) on internal components.

Noise floor

It is a normal phenomenon that an amplifier may produce some amount of noise (called noise floor or self-noise) which can be audible in speakers and headphones (in one or both channels).

Power transformer – Power filters and conditioners

It is a normal phenomenon that the device's power transformer may generate a certain amount of audible noise.

Very loud operation of the power transformer may be caused by low quality of power supply (voltage surges etc.).

In such a case, we suggest using a power filter or conditioner - you can also try to power this product from a different power line than other devices (e.g. from a power outlet in another room).

Specifications

Type	CI 4-zone stereo amplifier with MIC mixing
Power Output	2 x 60W RMS @ 8ohm 2 x 90W RMS @ 4ohm
THD	≤ 2% (30-20kHz)
Signal/Noise ratio	≥80dB (A-weighted)
Frequency Response	30Hz – 20kHz
Inputs	USB (MP3 / WMA / WAV / APE audio files) RCA stereo CD, AUX 3.5 mm stereo MP3 (front)
Output	PRE OUT
Microphone Input	Sensitivity 7mV; THD 1%; Frequency resp. 200Hz – 15kHz (+/-3dB)
Headphone Output	20mW(32ohm); THD 0.5%; Frequency resp. 100Hz – 15kHz (+/-3dB)
AC power / power consumption	220-240V 50/60Hz, 250W
Dimensions (H x W x D)	9.1 x 42 x 31.7 cm
Weight	6.2 kg / pc.

We reserve the right to change the technical data and the design of the product without notice as a result of further development.


We strongly advise to contact a professional installer or dealer in order to install TAGA Harmony products.

We recommend using high quality TAGA Harmony cables and other installation accessories.


Kit Content:

Amplifier	1 EA
Power Cable	1 EA
Instruction Manual	1 EA

EU declaration of conformity

	<p>Your product is marked with the symbol shown on the left. As its manufacturer, hereby we declare that the product is in compliance with the following EU directives and regulations: 2014/30/EU (EMC) & 2014/35/EU (LVD) & 2011/65/EU (RoHS)</p> <p>The full text of the EU declaration of conformity is available from the manufacturer.</p>
---	--

Disposal of the product

	<p>Disposal of old electrical & electronic equipment (applicable in the European Union and other countries with separate collection systems)</p> <p>This symbol on the product or on its literature and packaging indicates that this product shall not be treated as household waste. Instead it shall be handed over to the appropriate collection point for the recycling of electrical and electronic equipment. By ensuring that this product is disposed of correctly, you will help to prevent potential negative consequences for the environment and human health, which could be caused by inappropriate waste handling of this product. The recycling of materials will help to conserve natural resources. For more detailed information about recycling of this product, please contact your local government office, your household waste disposal service or the shop where you purchased the product.</p>
--	--

TAGA EUROPE
POLPAK POLAND Sp. z o.o.
AL.JEROZOLIMSKIE 331A
05-816 REGUŁY k/WARSZAWY, POLAND
Email: Sales@TagaHarmony.com

www.TagaHarmony.com